



MPY-T8 Pyramid-Fitting

ไทยเอกไฟ



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

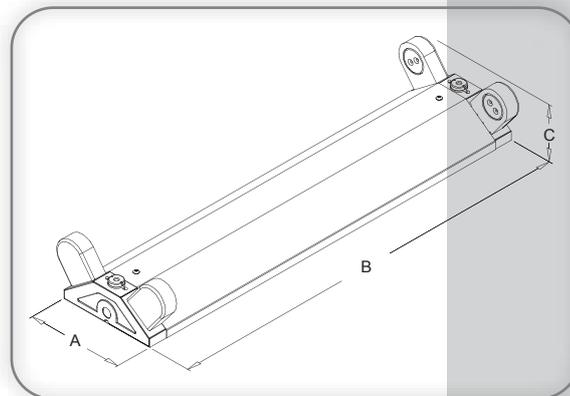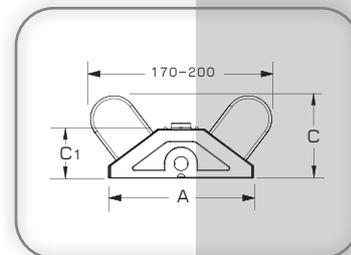


DIMENSION

| Model No. | No. of Lamps | A (mm.) | B (mm.) | C (mm.) | C1 (mm.) | Hanging hold (mm.) |
|-----------|--------------|---------|---------|---------|----------|--------------------|
| MPY220 | 2 x 18w | 162 | 620 | 71 | 53 | 484 |
| MPY240 | 2 x 36w | 162 | 1230 | 71 | 53 | 484 |
| MPY220S | 2 x 18w | 162 | 640 | 88 | 53 | 484 |
| MPY240S | 2 x 36w | 162 | 1250 | 88 | 53 | 484 |

Note: subject to +/- 2 mm in tolerance

MPY-AL

Pyramid Fitting with Aluminium Reflector

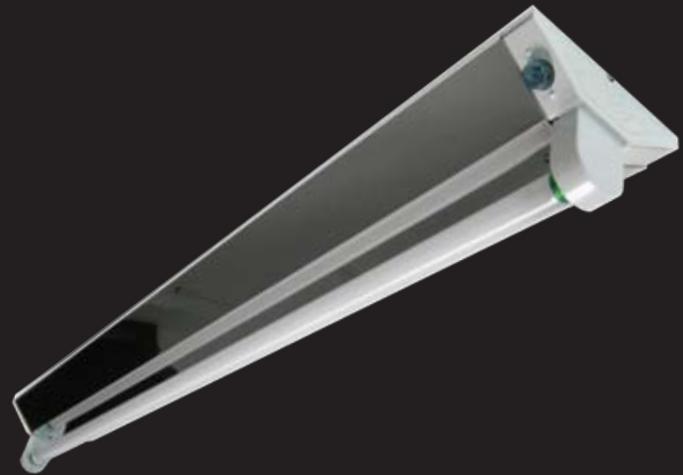

โคมอกโทแบบอลูมิเนียมสะท้อนแสง



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Reflector :** 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

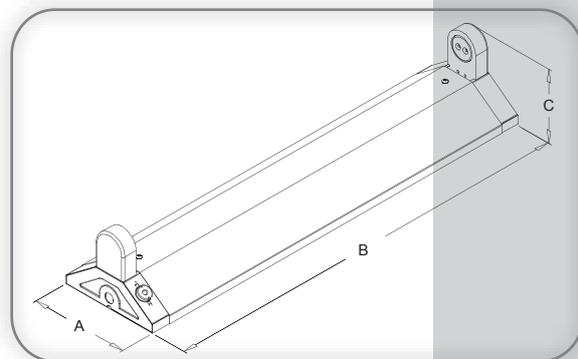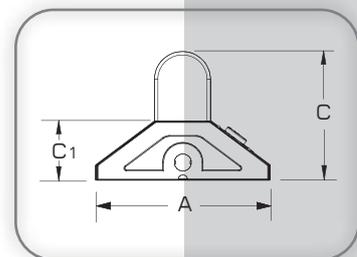

DIMENSION

| Model No. | No. of Lamps | A (mm.) | B (mm.) | C (mm.) | C1 (mm.) | Hanging hold (mm.) |
|-----------|--------------|---------|---------|---------|----------|--------------------|
| MPY120AL | 1 x 18w | 162 | 620 | 97 | 53 | 484 |
| MPY140AL | 1 x 36w | 162 | 1230 | 97 | 53 | 484 |
| MPY120SAL | 1 x 18w | 162 | 640 | 122 | 53 | 484 |
| MPY140SAL | 1 x 36w | 162 | 1250 | 122 | 53 | 484 |

Note: subject to +/- 2 mm in tolerance



MPY-T8 Pyramid Fitting

ไทยเอกไฟ



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

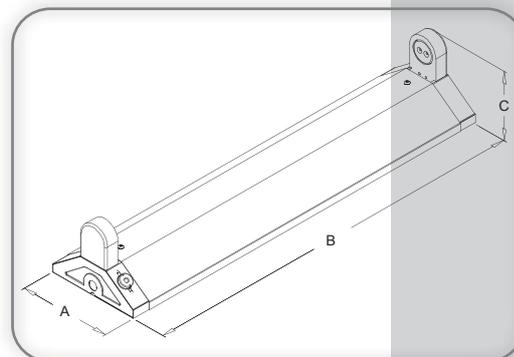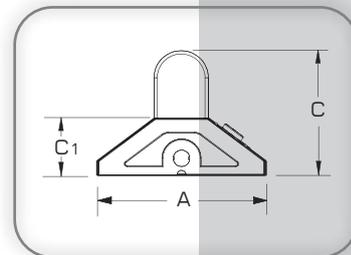


DIMENSION

| Model No. | No. of Lamps | A (mm.) | B (mm.) | C (mm.) | C1 (mm.) | Hanging hold (mm.) |
|-----------|--------------|---------|---------|---------|----------|--------------------|
| MPY120 | 1 x 18w | 162 | 620 | 97 | 53 | 484 |
| MPY140 | 1 x 36w | 162 | 1230 | 97 | 53 | 484 |
| MPY120S | 1 x 18w | 162 | 640 | 122 | 53 | 484 |
| MPY140S | 1 x 36w | 162 | 1250 | 122 | 53 | 484 |

Note: subject to +/- 2 mm in tolerance

MPY-AL

Pyramid Fitting with Aluminium Reflector

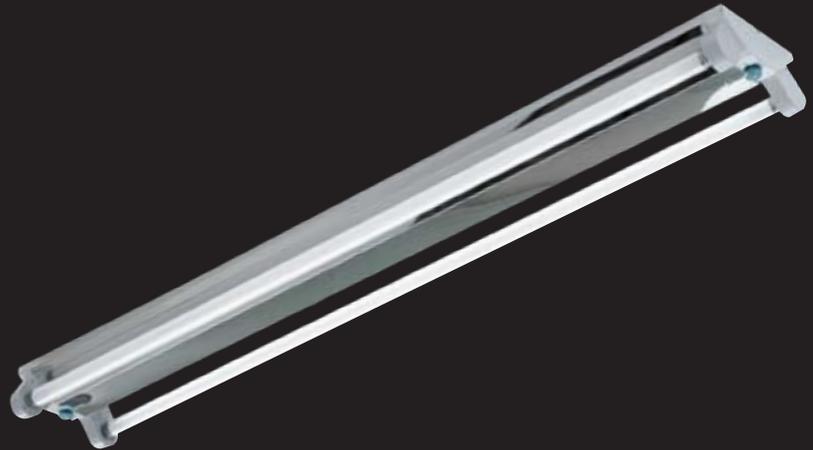

โคมอกไก่แบบฝาครอบ
แผ่นอลูมิเนียมสะท้อนแสง



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Reflector :** 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

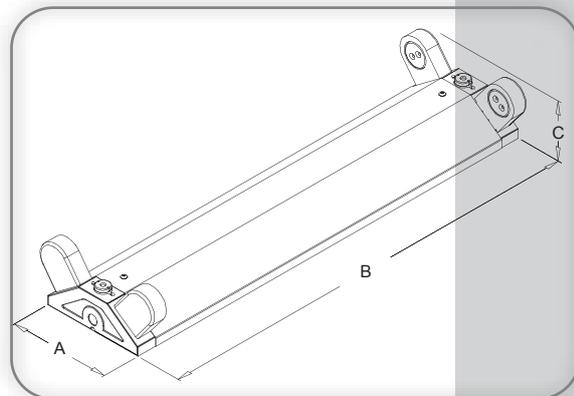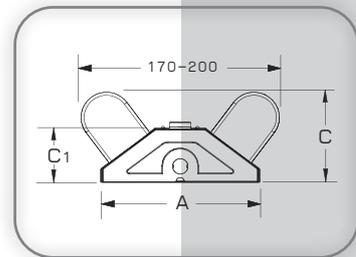

DIMENSION

| Model No. | No. of Lamps | A (mm.) | B (mm.) | C (mm.) | C1 (mm.) | Hanging hold (mm.) |
|-----------|--------------|---------|---------|---------|----------|--------------------|
| MPY220AL | 2 x 18w | 162 | 620 | 71 | 53 | 484 |
| MPY240AL | 2 x 36w | 162 | 1230 | 71 | 53 | 484 |
| MPY220SAL | 2 x 18w | 162 | 640 | 88 | 53 | 484 |
| MPY240SAL | 2 x 36w | 162 | 1250 | 88 | 53 | 484 |

Note: subject to +/- 2 mm in tolerance