

MFW-AL-T5

Factory Fitting with Aluminium Reflector for T5 (Wide Body)

โคมโรงงานปีกอลูมิเนียมสะท้อนแสง



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	Double side aluminium reflector 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
Lamp holder :	Rotary lock (G5) lamp holder certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

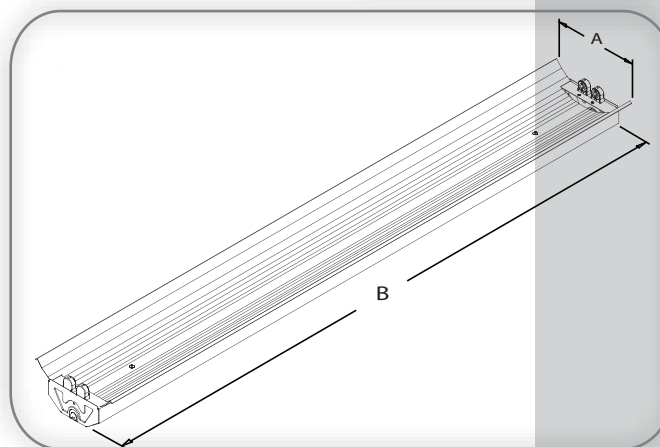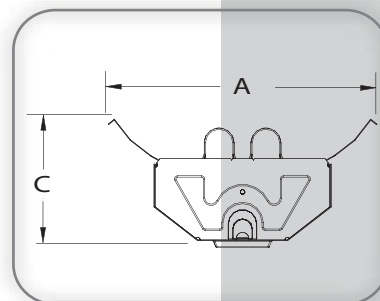

DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)
MFW-V1-228AL	2 x 28w T5	170	1173	80
MFW-V1-254AL	2 x 54w T5	170	1173	80

Note: subject to +/- 2 mm in tolerance

MFW

Factory Fitting with Mattal Reflector

โคมโรงงานปีกเหล็กพ่นสีขาว



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	Double side steel reflector with high-grade epoxy polyester power coating.
Lamp holder :	Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
Starter holder :	Rotary lock certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

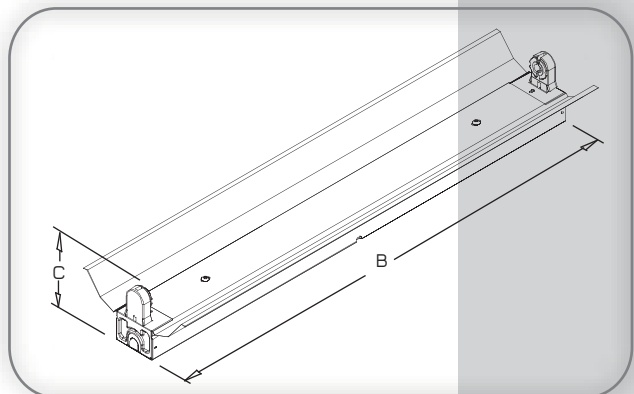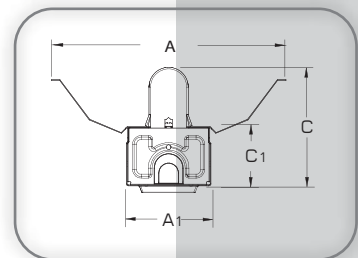

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)	C1 (mm.)
MFW120	1 x 18w	140	170	613	95	40
MFW140	1 x 36w	140	170	1223	95	40
MFW120S	1 x 18w	140	170	635	105	40
MFW140S	1 x 36w	140	170	1245	105	40

Note: subject to +/- 2 mm in tolerance



MFW-T Factory Fitting with Mattal Reflector

โคมโรงงานปีกเหล็กแผ่นสีขาว



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zine phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	Double side steel reflector with high-grade epoxy polyester power coating.
Lamp holder :	Twin rotary lock (G13) lamp holder certified by TIS NO.344-2549.
Starter holder :	Rotary lock certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

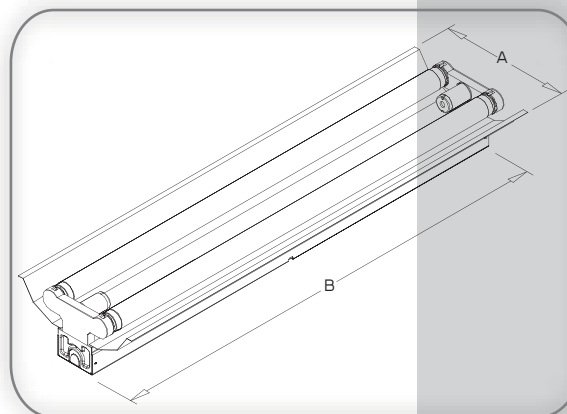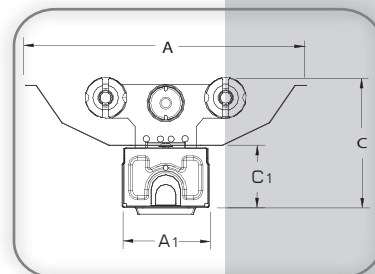


DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)	C1 (mm.)	Hanging hold (mm.)
MFW220T	2 x 18w	170	53	613	90	40	484
MFW240T	2 x 36w	170	53	1223	90	40	484

Note: subject to +/- 2 mm in tolerance

MFW

Factory Fitting with Mattal Reflector (Wide Body)

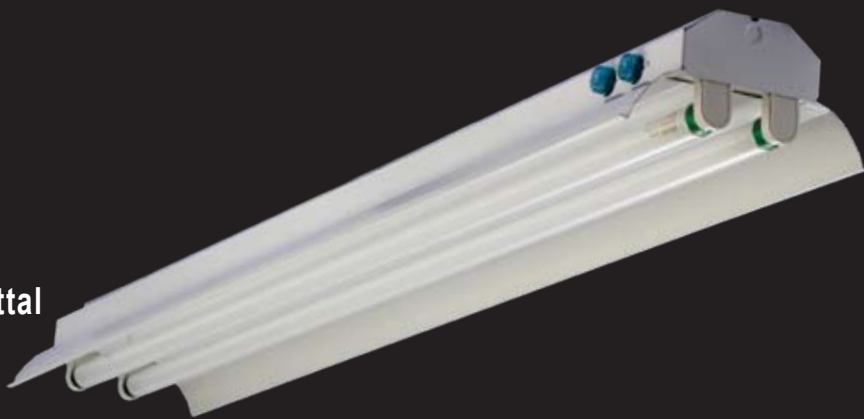

โคมโรงงานปีกเหล็กพันสีขาว



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	Double side steel reflector with high-grade epoxy polyester power coating.
Lamp holder :	Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
Starter holder :	Rotary lock certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

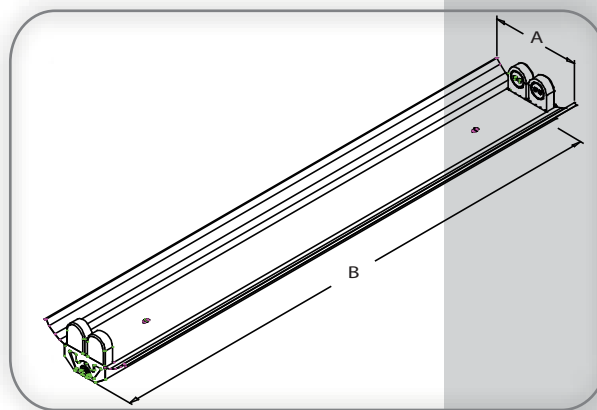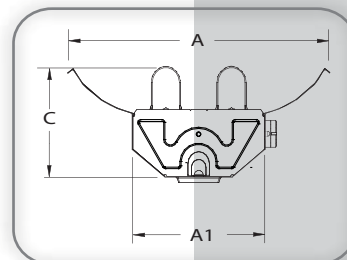

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)
MFW220	2 x 18w	210	115	613	95
MFW240	2 x 36w	210	115	1223	95
MFW220S	2 x 18w	210	115	635	105
MFW240S	2 x 36w	210	115	1245	105

Note: subject to +/- 2 mm in tolerance



FW-AL Clip-On Aluminium Reflector Wing

แผ่นสะท้อนแสงแอลยูมินั่ม

Specially designed for use in existing channel lighting to increase output and save energy, easy to install just clip into fluorescent tubes.



TIS.902-2532




TIS.1955-2542




SPECIFICATION

Reflector : Parabolic high purity anodized aluminium reflector
base material minimum 99.90% total reflectance of TR 87%

Luminaire: PROJECT: FW140 AL01
Lamps: 1 x Fluor. 36W 1200mm #83 white

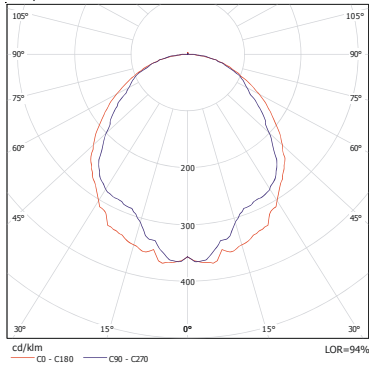

DRAWING

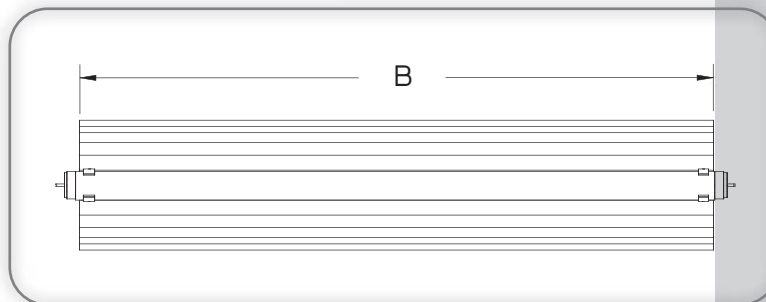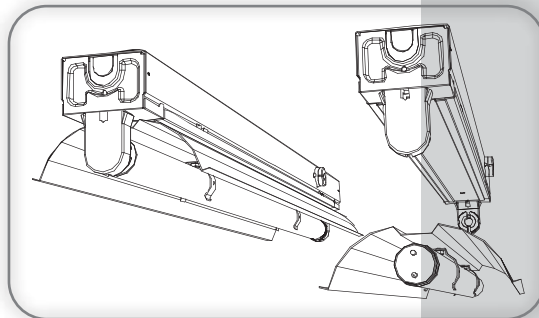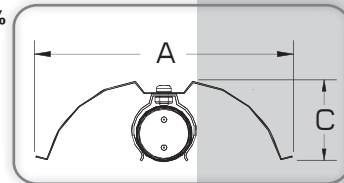

DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)
FW120	1 x 18w	120	570	40
FW140	1 x 36w	120	1180	40

Note: subject to +/- 2 mm in tolerance

MFW-AL

Factory Fitting with
Aluminium Reflector



โคมโรงงานปีกอลูมิเนียมสะท้อนแสง



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	Double side aluminium reflector 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
Lamp holder :	Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
Starter holder :	Rotary lock certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.


DRAWING

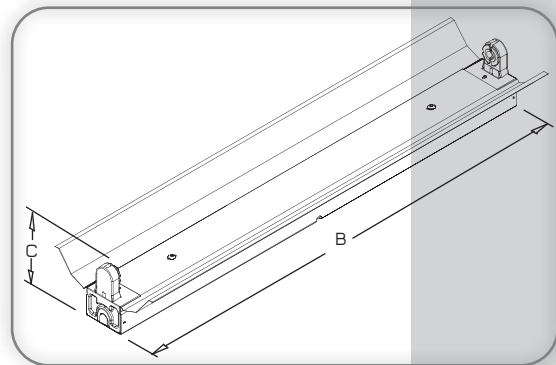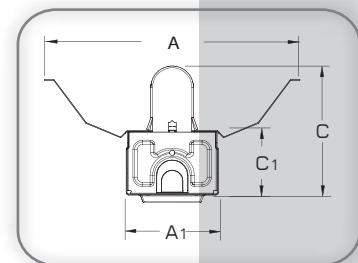

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)	C1 (mm.)
MFW120AL	1 x 18w	140	170	613	95	40
MFW140AL	1 x 36w	140	170	1223	95	40
MFW120SAL	1 x 18w	140	170	635	105	40
MFW140SAL	1 x 36w	140	170	1245	105	40

Note: subject to +/- 2 mm in tolerance

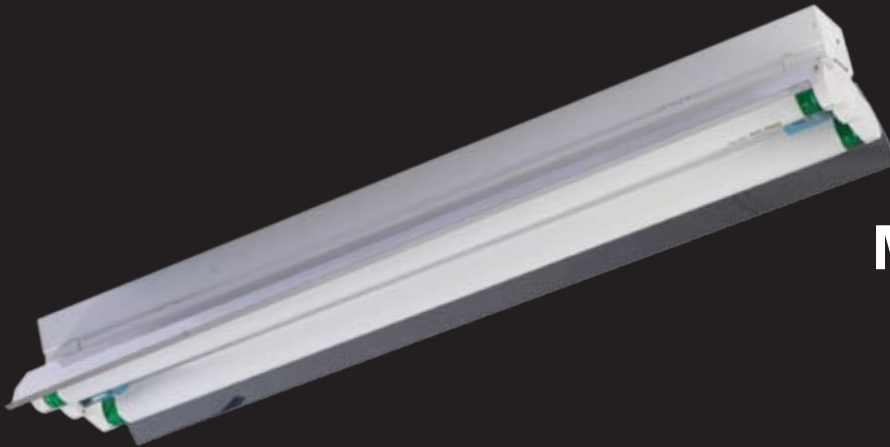

MFW-T-AL

Factory Fitting with
Aluminium Reflector

โคมโรงงานปีกอลูมิเนียมสะท้อนแสง



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	Double side aluminium reflector 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
Lamp holder :	Twin rotary lock (G13) lamp holder certified by TIS NO.344-2549.
Starter holder :	Rotary lock certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

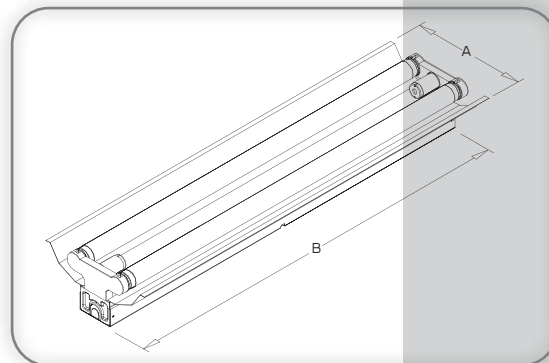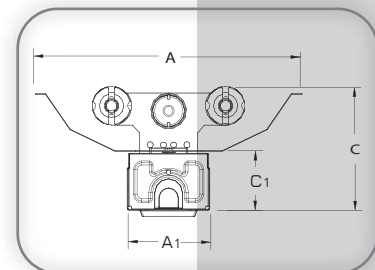

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)	C1 (mm.)	Hanging hold (mm.)
MFW220TAL	2 x 18w	170	53	613	90	40	484
MFW240TAL	2 x 36w	170	53	1223	90	40	484

Note: subject to +/- 2 mm in tolerance



MFW-AL-T5

Factory Fitting with Aluminium Reflector for T5 (Wide Body)

โครงการงานปีกอลุมิเนียมสะท้อนแสง



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Reflector :** Double side aluminium reflector 99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
- Lamp holder :** Rotary lock (G5) lamp holder certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

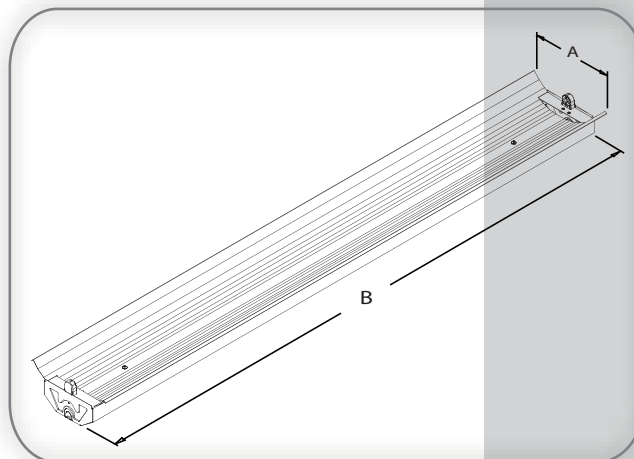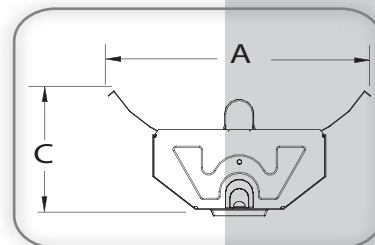

DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)
MFW-V1-128AL	1 x 28w T5	170	1173	80
MFW-V1-154AL	1 x 54w T5	170	1173	80

Note: subject to +/- 2 mm in tolerance