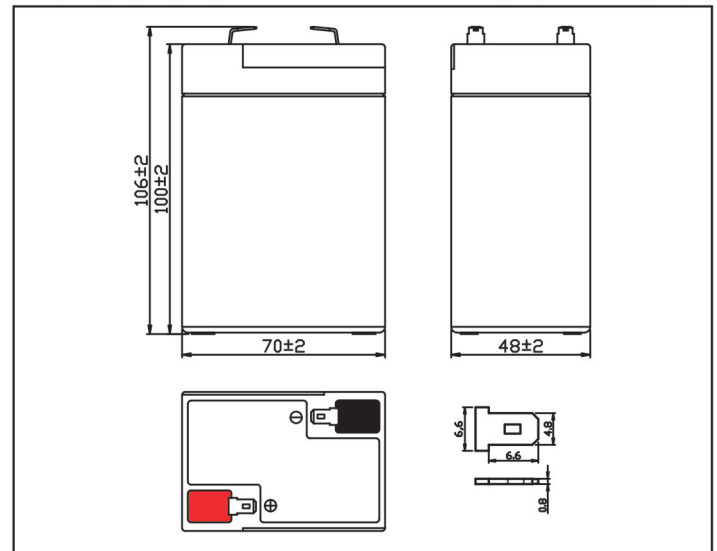


MODEL: OT5-6
NO.: 302010005-00224

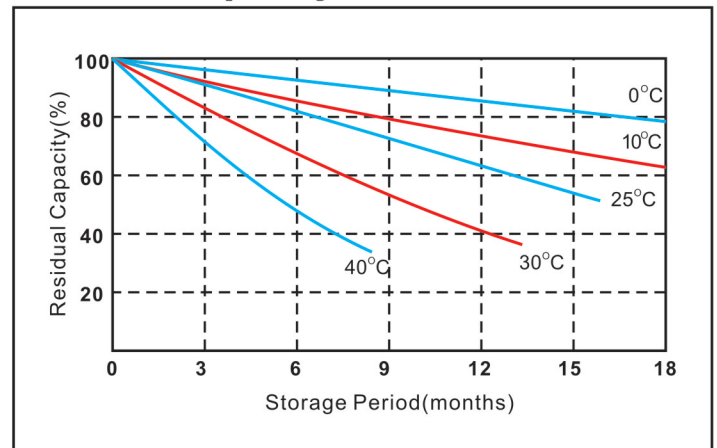
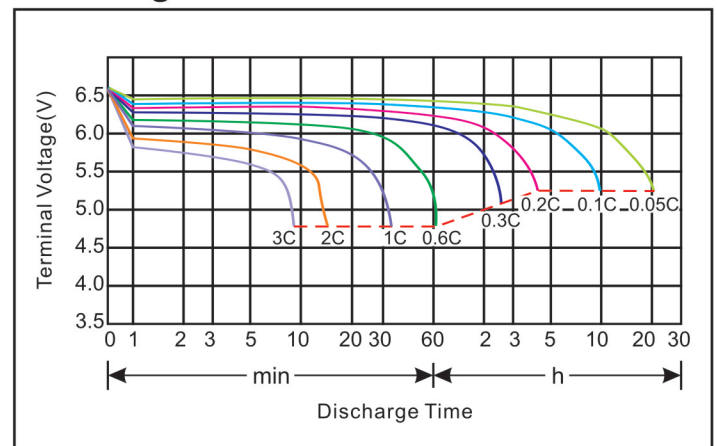
Plane Chart:

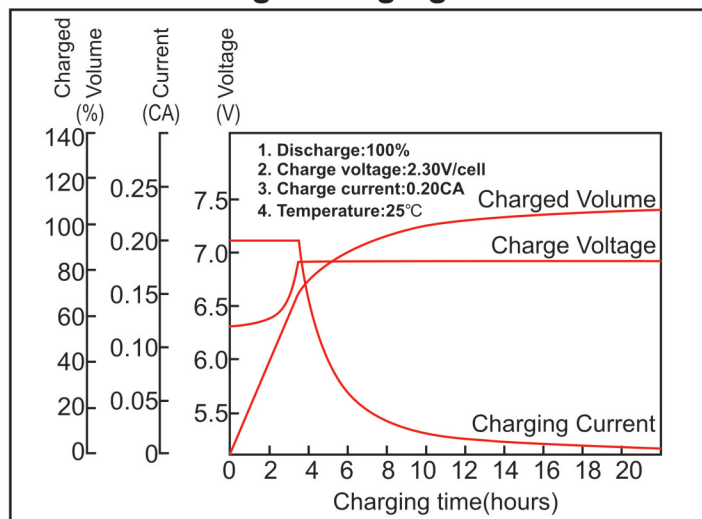
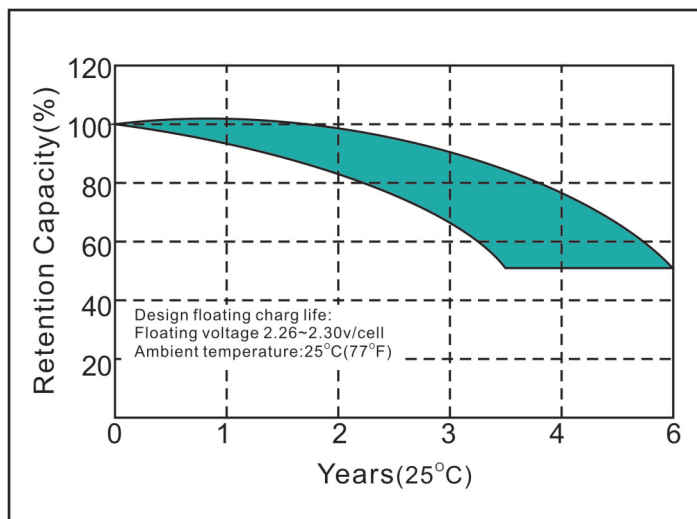
Unit:(mm) Terminal type:(F1)


Parameter Chart:

Volts		6V
Capacity(25°C)	20 hours rate (0.25A)	5Ah
Discharge Current Testing (25°C)	20 I ₂₀ rate (5A,27min)	34min
	60 I ₂₀ rate (15A,7min)	8min
Internal Resistance	Full Charged Battery 25°C	18mΩ
Capacity Affected By Temperature	40°C	104%
	25°C	100%
	0°C	83%
	-15°C	65%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 1.5A Voltage 7.25~7.45V
	Float (25°C)	Charge Voltage 6.8~6.9V
Weight (Approx)		0.77Kg

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Residual Capacity

Discharge Current 25°C


MODEL: OT5-6
NO.: 302010005-00224
Constant voltage charging characteristics

Float Life

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	21.2	13.3	9.41	5.69	3.17	1.81	1.31	0.86	0.56	0.47	0.26
5.10V	18.8	12.4	9.03	5.46	3.04	1.77	1.29	0.85	0.55	0.46	0.25
5.25V	17.5	12.0	8.80	5.33	2.97	1.75	1.27	0.84	0.55	0.45	0.25
5.40V	16.8	11.4	8.57	5.19	2.89	1.73	1.25	0.83	0.54	0.44	0.24

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	114.5	72.5	51.9	30.4	20.58	10.41	7.60	5.38	3.60	2.83	1.55
5.10V	103.4	68.8	50.8	30.1	19.84	10.18	7.48	5.32	3.54	2.77	1.49
5.25V	97.1	67.2	49.4	29.6	19.61	10.24	7.43	5.37	3.51	2.74	1.49
5.40V	94.1	64.4	48.5	28.9	19.15	10.12	7.31	5.25	3.45	2.68	1.43

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	6V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.