

MCF-T8

Channel Fitting (Wide Body)



โคมหลอดเหล็ก



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

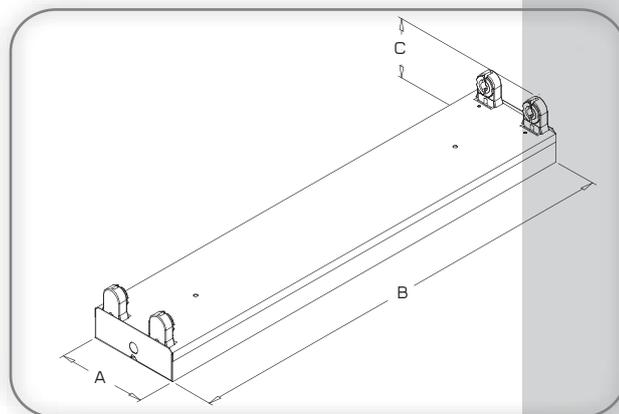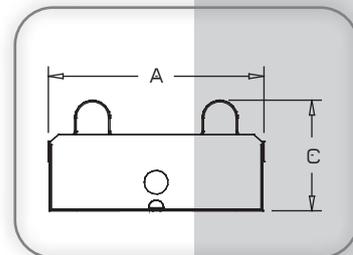

DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)
MCF220	2 x 18w	150	613	80
MCF240	2 x 36w	150	1223	80
MCF220S	2 x 18w	150	635	105
MCF240S	2 x 36w	150	1245	105

Note: subject to +/- 2 mm in tolerance



MCF-T8 Channel Fitting

โคมท่อแอลอีดี



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

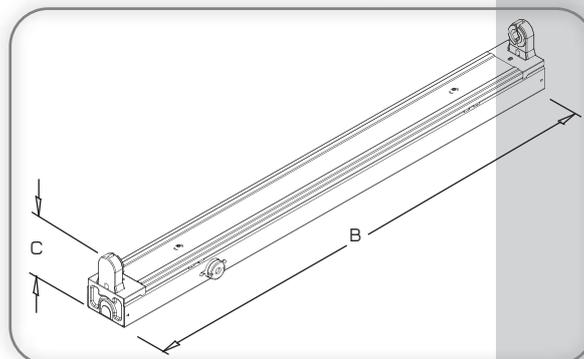

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)	Hanging hold (mm.)
MCF120	1 x 18w	52	63	613	80	484
MCF140	1 x 36w	52	63	1223	80	484
MCF120S	1 x 18w	52	63	635	90	484
MCF140S	1 x 36w	52	63	1245	90	484

Note: subject to +/- 2 mm in tolerance

MCF-T

Channel Fitting

โคมท่อแอลอีดี



TIS.902-2532





TIS.1955-2542

SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Lamp holder :** Rotary lock or spring load (G13) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

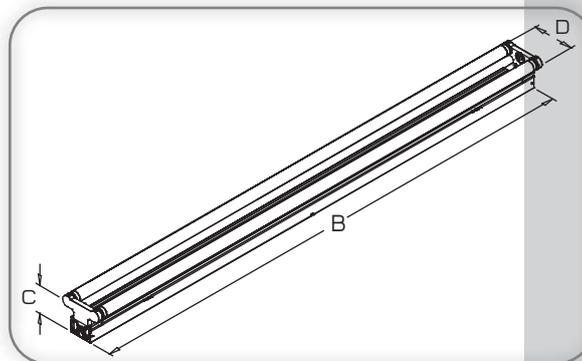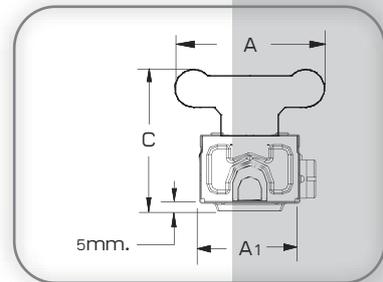

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	C (mm.)	Hanging hold (mm.)
MCF220T	2 x 18w	100	52	613	85	484
MCF240T	2 x 36w	100	52	1223	85	484

Note: subject to +/- 2 mm in tolerance