

# MSB

## Fluorescent High Bay with Wire Guard



โคมฟลูออโรสเซนต์ ไฮเบย์

High Efficiency Lighting and Save Energy Costs



TIS.902-2532






TIS.1955-2542

### SPECIFICATION

- Housing :** Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
- Reflector :** 99.99% purity anodized aluminium reflector to provide total reflectance of TR 95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
- Frame for diffuser :** High quality steel wire guard with 3.0 mm.thickness Extrude aluminium frame with high-grade epoxy polyester power coating, steel clip lock at front cover.
- Lamp holder :** Rotary lock (G13 or G5) lamp holder certified by TIS NO.344-2549.
- Starter holder :** Rotary lock certified by TIS NO.344-2549.
- Wire :** Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

### DRAWING

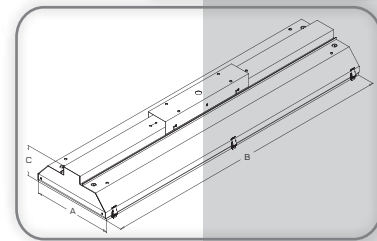

### DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)	C1 (mm.)
MSB240WG-AL	2 x 36w	330	1223	135	150
MSB340WG-AL	3 x 36w	480	1223	135	150
MSB440WG-AL	4 x 36w	630	1223	135	150
MSB228WG-AL	2 x 28w T5	330	1223	135	150
MSB328WG-AL	3 x 28w T5	380	1223	135	150
MSB428WG-AL	4 x 28w T5	480	1223	135	150
MSB254WG-AL	2 x 54w T5	330	1223	135	150
MSB354WG-AL	3 x 54w T5	380	1223	135	150
MSB454WG-AL	4 x 54w T5	480	1223	135	150

Note: subject to +/- 2 mm in tolerance