

COMPACT-T5

Surface modura fitting

โคมติดลอย Slim type



TIS.902-2532





TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating
Diffuser :	Is made optic luminance control (Nylon 66 mat) Option diffuser cover : Prismatic = PM
Lamp holder :	Rotary lock (G5) lamp holder certified by TIS NO.344-2549.
Starter holder :	Rotary lock certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm.70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

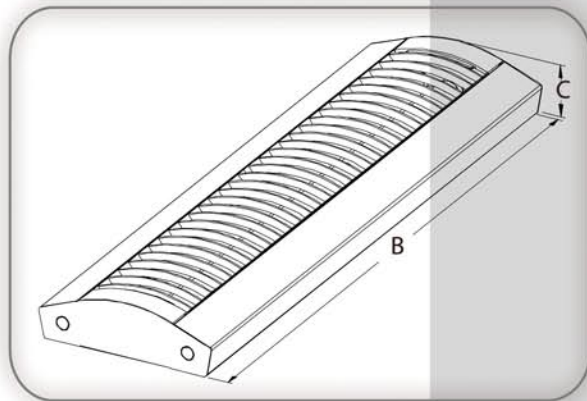

DIMENSION

Model No.	No. of Lamps	A (mm.)	B (mm.)	C (mm.)
M-COP114xx	1 x 14w	198	675	60
M-COP128xx	1 x 28-54w	198	1285	60
M-COP214xx	2 x 14w	198	675	60
M-COP228xx	2 x 28-54w	198	1285	60

Note: subject to +/- 2 mm in tolerance